

HEATER HEATEC Series Sell sheet

HEATEC

Certificates

- CE Compliant

Application

Provides protection from condensation and low temperatures in Control Panels, Electronic Enclosures, Hydraulic and Pneumatic machinery




Features

- Safe, Reliable and consistent heat for long periods by means of PTC (Positive Temperature Coefficient) heater
- Highly efficient and low profile
- Connects easily with push connectors for 3 wires. From AWG 20 to AWG 16 (0.5 - 2.5 mm²).
- Built in safety feature prevents overheating
- Used with Normally Closed Thermostat and Hygrostat
- Black anodized aluminum housing
- Mounts easily on 35 mm DIN Rail EN 50 022
- Available in 30 Watt to 150 Watt


Color

- Black



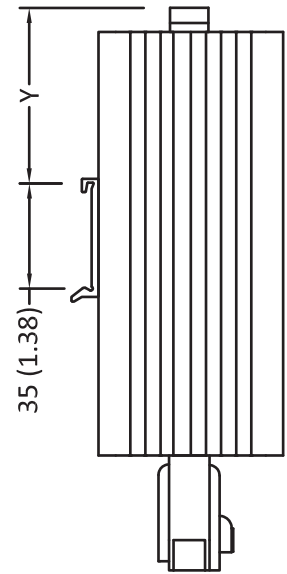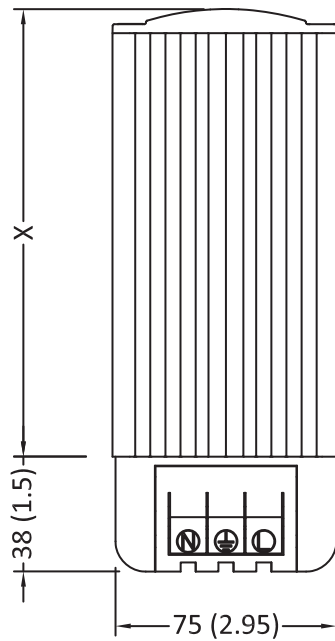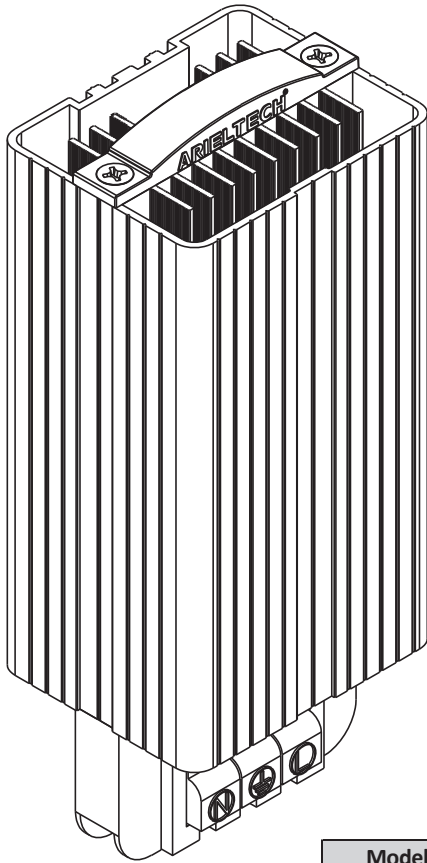

Model No.	X	Y
HEATEC-35	78±0.5 mm	10±1 mm
HEATEC-45	(3 1/16"±3 15/16")	(3/8"±3 15/16")
HEATEC-60	148±0.5mm	50±1 mm
HEATEC-80	(5 13/16"±3 15/16")	(2"±3 15/16")
HEATEC-100		
HEATEC-130	198±0.5mm	50±1 mm
HEATEC-150	(7 13/16"±3 15/16")	(2"±3 15/16")

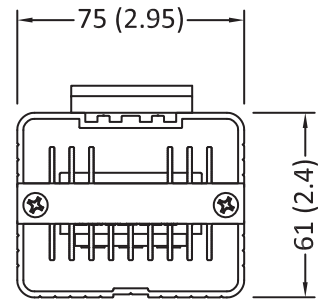

• All Dimensions : mm (Inch)

Technical Data

Heater Model No.	Power* (WATT)	Voltage (VAC/DC)	Inrush Current 110/220 VAC	Dimensions mm (Inch)	Weight KG(lb)	Max Temperature °C (°F)
HEATEC-035	35	110-240	1 A/2.2 A	116x75x61 (4.57x2.95x2.4)	0.5 (1.1)	100 (212)
HEATEC-045	45	110-240	2 A/4 A	116x75x61 (4.57x2.95x2.4)	0.5 (1.1)	110 (230)
HEATEC-060	60	110-240	2 A/3 A	186x75x61 (7.32x2.95x2.4)	0.7 (1.55)	90 (194)
HEATEC-080	80	110-240	2 A/4 A	186x75x61 (7.32x2.95x2.4)	0.7 (1.55)	100 (212)
HEATEC-100	100	110-240	5 A/9 A	186x75x61 (7.32x2.95x2.4)	0.7 (1.55)	115 (240)
HEATEC-130	130	110-240	6 A/ 10 A	236x75x61 (9.29x2.95x2.4)	0.9 (2)	110 (230)
HEATEC-150	150	110-240	7 A/11.5 A	236x75x61 (9.29x2.95x2.4)	0.9 (2)	120 (250)

* At 20°C (68 °F) ambient temperature.